

Email: marketing@douyee.com.sg Website: www.douyee.com

Product Data Sheet

PRODUCT CODE / PART NUMBER: DY6008-HS-354C-NAVY BLUE-35M-RUBBER-S1-SIZE

PRODUCT: Static Dissipative Safety Sneaker, Navy Blue

BRAND NAME: **EUROSTAT**®

FEATURES:

This safety shoe is made of Navy Blue Microfiber PU, Mesh Lining, Hi-Poly Insole, Rubber Outsole and Composite Toe Cap

- 200J Impact Resistance
- 15KN Compression Resistance
- Light Weight, Excellent Comfort
- Resistant to Oil and Most Chemicals
- Non-Marking and Slip Resistance Outsole










Specifications

Item	Properties / Typical Values	Test Method		
Materials	Upper : Microfiber PU			
	Toe Cap : Composite			
	Outsole : Static Dissipative Rubber			
Footwear only Resistance	$< 1.0 \times 10^9 \text{ ohms}$	ANSI/ESD STM9.1		
Footwear System Resistance	$< 3.5 \times 10^7 \text{ ohms}$	ANSI/ESD STM9.1		
Electrical System Resistance of a person wearing footwear while standing on conductive flooring	$< 3.5 \times 10^7 \text{ ohms}$	ANSI/ESD STM97.1		
Color	Upper : Navy Blue Outsole : White			
Sizes (European)	225, 230, 235, 240, 245, 250, 255, 260, 265, 270, 275, 280, 285, 290 & 300mm			
Conformity	 The safety footwear detailed herein meets the criteria accordance with Article 10 of the PPE Directive (89/686 corrigendum up to 14/12/2010 for intermediate design shown through satisfactory testing to EN ISO 20345:201 File Documentation (Category: S1 SRC) SNI 7079-2009 (NPB 104-116-170603) CNS 20345: 2015 (R3B081) 	6/EEC) including amendments and category products. This has been		

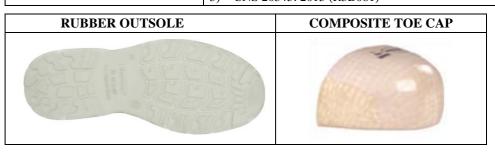

Size (mm)	225	230	235	240	245	250	255	260	265	270	275	280	285	290	300
Average weight per pair (g)	825	860	893	936	954	979	1016	1033	1047	1063	1128	1160	1234	1307	1353

The values shown above were developed from random samples taken from production material. To the best of our knowledge, we believe them to be typical for the product. However actual values may vary somewhat from those depicted here and Dou Yee Enterprises makes no warranty, expressed or implied, as to the suitability of these materials for any specific use. Customers should determine product suitability based upon their own internal criteria.

Date: 2020 / 2021